



# Gusmer<sup>®</sup> H-20/35

For Spray Foam and Polyurea Applications



PROVEN QUALITY. LEADING TECHNOLOGY.

# Designed With Ease of Service in Mind

The Gusmer H-20/35 has its electrical cabinet on top of the machine, making it easy to access for all service needs.

With standard off-the-shelf hardware, it's therefore easy to use and easy to maintain.



**Ideal for a wide range of spray foam and polyurea applications:**



**COMMERCIAL WALL**



**BED LINER COATING**



**WATER PROOFING**



# Graco Quality You Can Expect

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry.



## Extended 10 Year Warranty

**10 year warranty** on the **pressure monitoring control hardware**.


Monitors your jobs for peace of mind that you're spraying within specifications.

## Economical Price Point

The affordable solution to get the job done.



RIM AND BAND JOIST

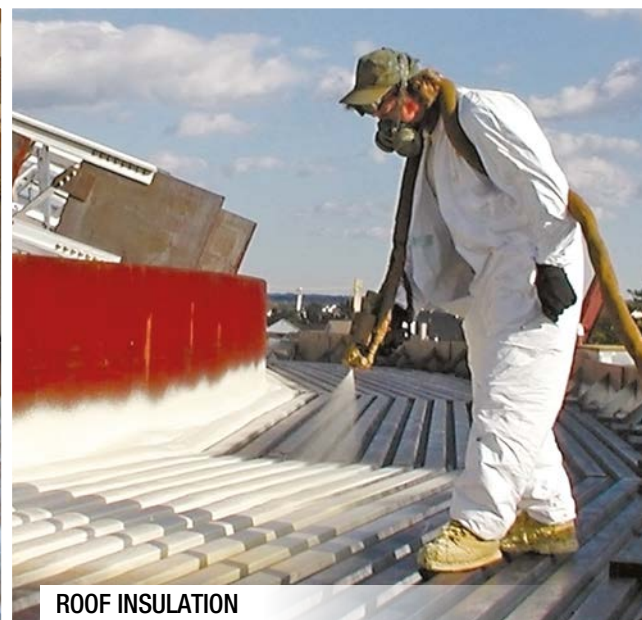

ROOF INSULATION

# Simple Controls for Ease of Use

## Cycle Counter

- Track material usage with resettable cycle counter

## Temperature Controllers


- Manually adjust chemical and hose heat zone temperatures

## Main Power Disconnect

- Safely work on equipment when system is off

## Main Power Indicator Light

- Green light indicates system power is on

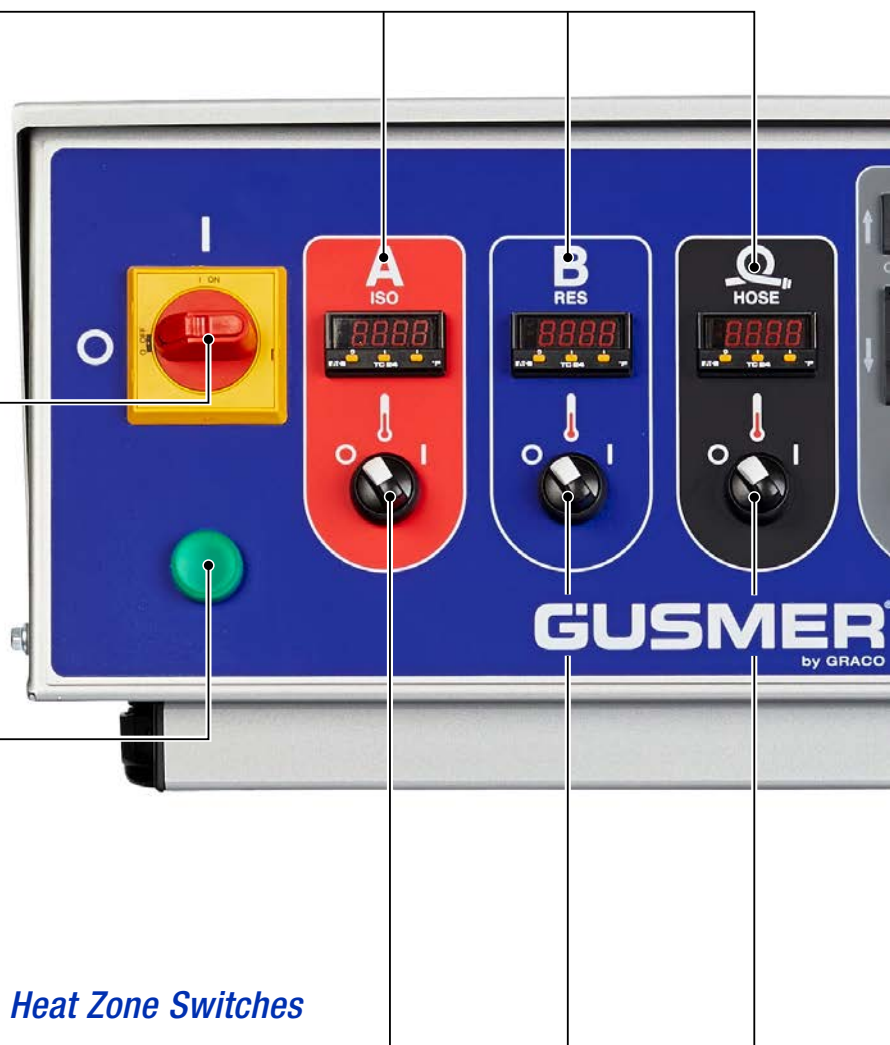

## Heat Zone Switches

- Turn heat zones on/off

## Count Down

- Allows for custom countdown of cycles to shut off pump before running out of chemical

### *Pump Control Switch*

- Change between Park and Pump modes

### *Motor Power Switch*

- Turn motor on/off

### *Control Power Switch*

- Turns control power on/off

### *Pressure Monitor*

- Manually set desired pressure differential pump shut down


### *Pump Direction Indicator*

- Visual representation of pump movement



## *Over 35% fewer connection points than comparable non-Graco systems*

- Point-to-point wiring
- Easy troubleshooting

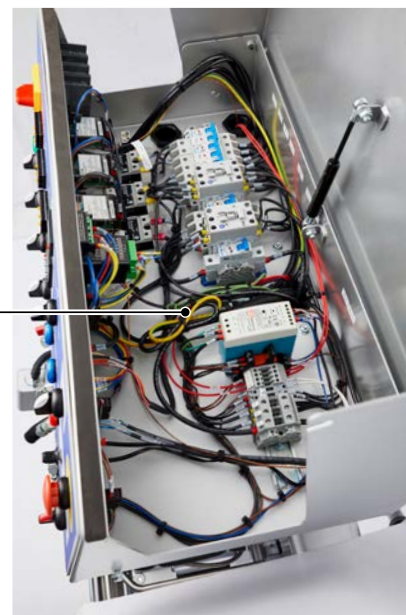

## *Circulation Valves*

- Proven design
- Easy pressure balancing
- Set up for easy recirculation

## *Easy Troubleshooting Diagnosis*

- Y-strainers for analog inlet temp and pressure gauges




## *Graco Horizontal Pump Line*

- Robust, industry proven
- Slower cycle rate
- Longer pump life
- Easy maintenance

## *Clear Pump Cover*

- For easy visual movement of pump line



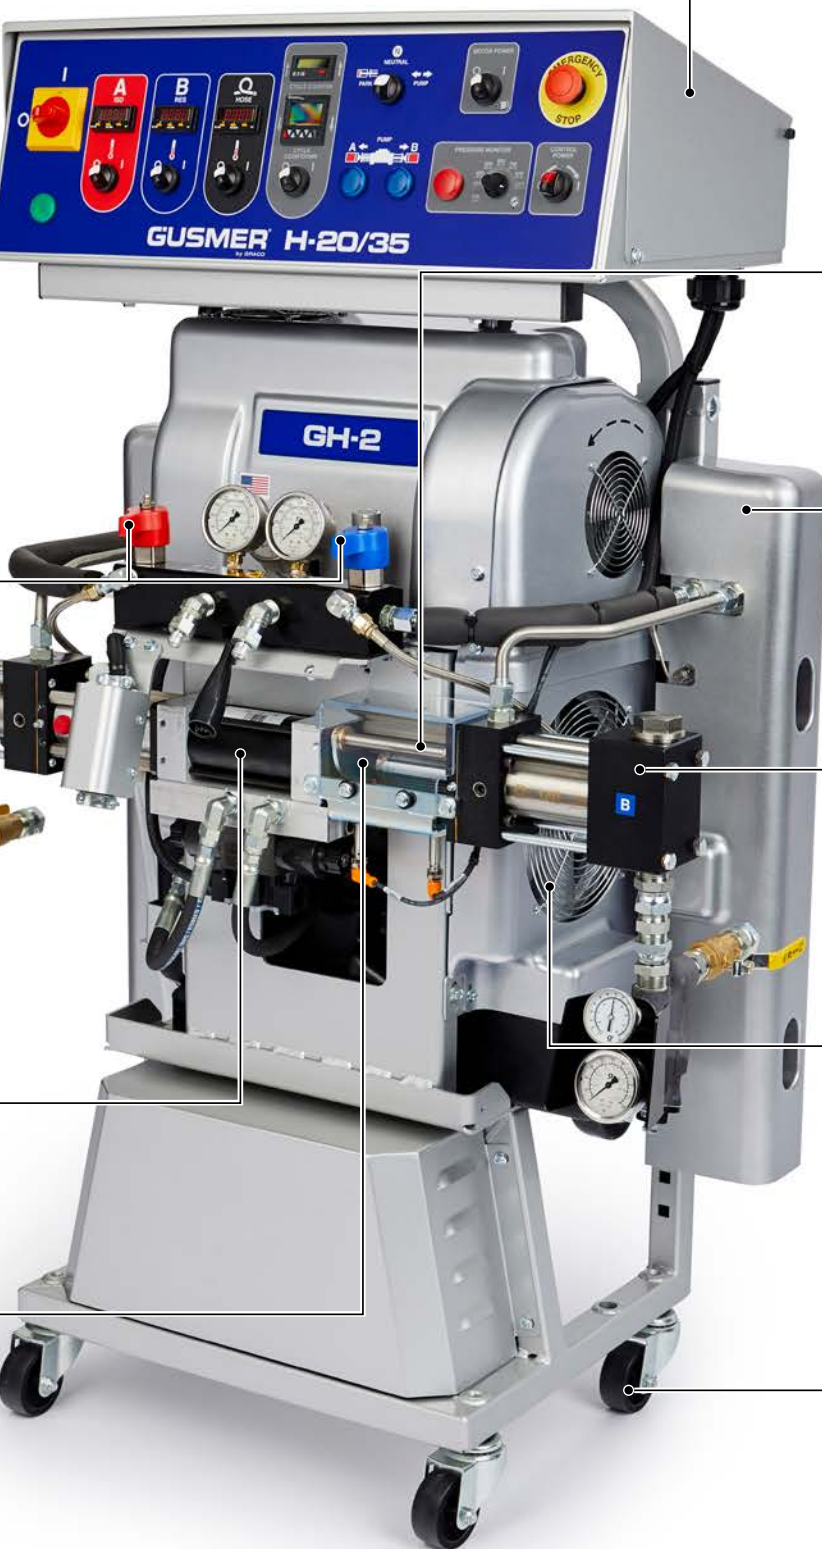

### *Electrical Cabinet*

- Easy access
- Simple controls

### *Reversing Sensor*

- Non-contact for longer life

### *Hybrid Heaters*

- Proven design
- Quick, even heating

### *Pump Lowers*

- Easy to service
- Multiple sizes for off-ratio applications

### *Hydraulic System*

- Actively cooled system to keep hydraulic fluid cool
- 13,5L (3.5 gal) hydraulic fluid reservoir

### *Caster Kit*

- Kit part #17G340 for portability


# Understand Spray Performance

Use this chart to help identify how the system will work most efficiently with each mix chamber. Flow rates are based on a material viscosity of 60 cps. See example below.


## How to use this chart

- Select spray pressure
- Select mix chamber or flow rate

FOAM

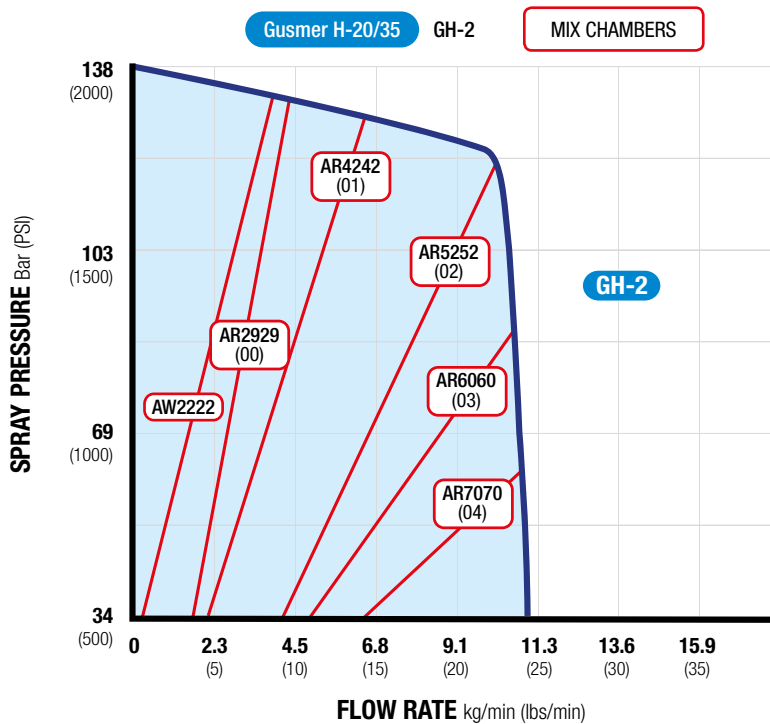

POLYUREA

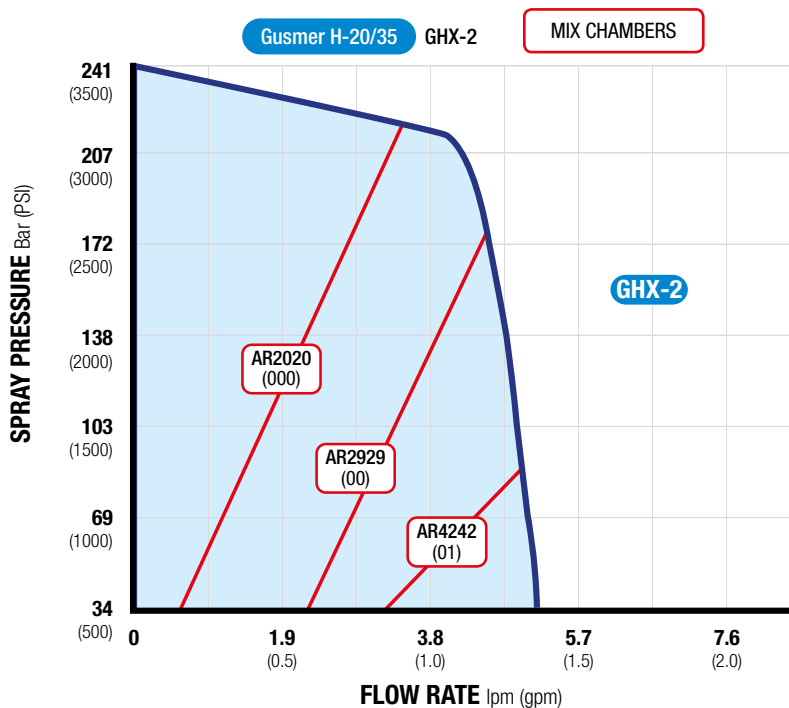



# Technical Specifications and Ordering Information



GUSMER MODEL	GH-2	GHX-2
	<i>Spray Foam applications</i>	<i>Coating Applications</i>
<b>SPECIFICATIONS</b>		
Maximum Working Pressure	138 Bar (2.000 PSI, 13.8 Mpa)	241 Bar (3.500 PSI, 24.1 Mpa)
Maximum hose length	98 meter (320 ft)	
Maximum Fluid Temperature	88°C (1901°F)	
Output	10.5 Kg/minute (24 lbs/minute)	4,8 liter/minute (1.25 gallon/minute)
Weight	247 Kg	252 Kg
Dimensions	81cm x 53cm x 137cm (32" x 21" x 54")	
Operations and Repair manual	3A5376	3A5587
<b>BARE PACKAGES</b>		
	<b>26C202:</b> GH-2, Bare, 10 KW, 400 Volt, 3 phase +N	<b>26C205:</b> GHX-2, bare, 15 KW, 400 Volt, 3 phase +N
<b>PACKAGES:</b>		
includes: <ul style="list-style-type: none"> <li>• system</li> <li>• 15 meter (50 ft) heated hose</li> <li>• 3 meter (10 ft) whip end</li> </ul>	<b>APC202:</b> GH-2 Package with Fusion AP gun, 400 Volt, 3 phase +N	<b>APC205:</b> GHX-2 Package with Fusion AP gun, 400 Volt, 3 phase +N
	<b>CSC202:</b> GH-2 Package with Fusion CS gun, 400 Volt, 3 phase +N	
	<b>P2C202:</b> GH-2 Package with P2 gun, 400 Volt, 3 phase +N	<b>P2C205:</b> GHX-2 Package with P2 gun, 400 Volt, 3 phase +N



## ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

## GRACO LOCATIONS

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612-623-6000  
Fax: 612-623-6777

### AMERICAS

#### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88-11th Avenue N.E.  
Minneapolis, MN 55413

### EUROPE

#### BELGIUM

European Distribution Center  
Graco Distribution BVBA  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
3630 Maasmechelen,  
Belgium  
Tel: 32 89 770 700  
Fax: 32 89 770 777

### ASIA PACIFIC

#### AUSTRALIA

Graco Australia Pty Ltd.  
Suite 17, 2 Enterprise Drive  
Bundoora, Victoria 3083  
Australia  
Tel: 61 3 9468 8500  
Fax: 61 3 9468 8599

#### CHINA

Graco Hong Kong Ltd.  
Shanghai Representative Office  
Building 7  
1029 Zhongshan Road South  
Huangpu District  
Shanghai 200011  
The People's Republic of China  
Tel: 86 21 649 50088  
Fax: 86 21 649 50077

### INDIA

Graco Hong Kong Ltd.  
India Liaison Office  
Room 432, Augusta Point  
Regus Business Centre 53  
Golf Course Road  
Gurgaon, Haryana  
India 122001  
Tel: 91 124 435 4208  
Fax: 91 124 435 4001

#### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81 45 593 7300  
Fax: 81 45 593 7301

#### KOREA

Graco Korea Inc.  
38, Samsung 1-ro 1-gil  
Hwaseong-si, Gyeonggi-do, 18449  
Republic of Korea  
Tel: 82 31 8015 0961  
Fax: 82 31 613 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.



Europe  
+32 89 770 700  
FAX +32 89 770 777  
WWW.GRACO.COM

©2018 Graco Distribution BVBA 349982ENEU Rev. A 05/18 Electronic Version only.  
All other brand names or marks are used for identification purposes and are trademarks of their respective owners.